


A robust secondary floor covering.

Noopli acts as a secondary floor covering, enabling effective contamination and particulate control at floor level from both feet and wheels.

Noopli has a variety of products to suit the majority of traffic types; from light traffic such as footfall to heavy traffic such as forklifts. Our blend of specially sourced adhesives enables instant adhesion to the sub-floor and is instantly usable, no waiting, no curing - installed and ready to go for all traffic types.

It's incredibly important to consider the environment that Noopli is going into and choose the appropriate product. Together with our direct survey team or trusted partner we will walk the facility with you and guide you on best placement and what activities should be performed on the mat.

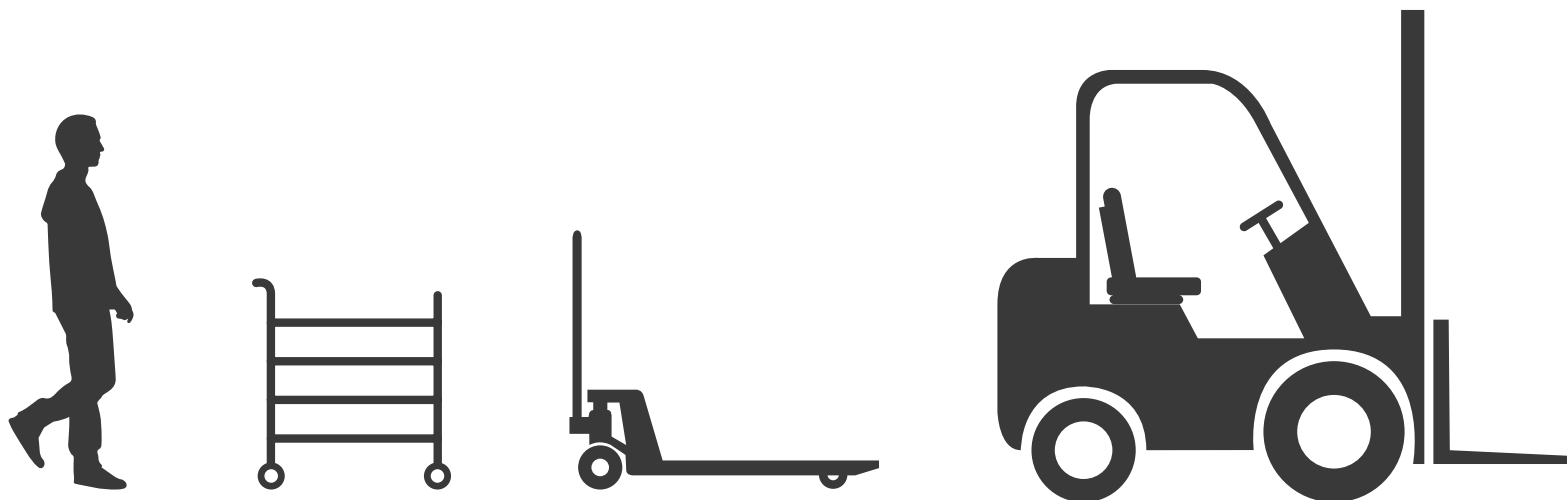

3 or more footsteps are considered an acceptable contact frequency.



3 or more wheel rotations are considered an acceptable contact frequency - regardless of diameter.